



Cable ID: C6-FLAT CABLE-15M-01

Test Summary: PASS



Date / Time: 05/26/2009 06:22:20pm
Headroom: 2.9 dB (NEXT 45-78)
Test Limit: TIA Patch Cord Cat6 15.0m
 Cable Type: Cat 6 UTP SEED FLAT TYPE

Operator: QA
 Software Version: 2.1200
 Limits Version: 1.3400
 NVP: 69.0%

Model: DTX-1800
 Main S/N: 9406011
 Remote S/N: 9406012
 Main Adapter: DTX-PCU6M
 Remote Adapter: DTX-PCU6R


Wire Map (T568B)

PASS




Length (m)	N/A
Prop. Delay (ns)	[Pair 12] ?
Delay Skew (ns)	[Pair 12] ?
Resistance (ohms)	[Pair 45] 16.1

	Worst Case Margin		Worst Case Value	
	MAIN	SR	MAIN	SR
PASS				
Worst Pair	45-78		45-78	
NEXT (dB)	2.9		2.9	
Freq. (MHz)	228.0		228.0	
Limit (dB)	38.2		38.2	

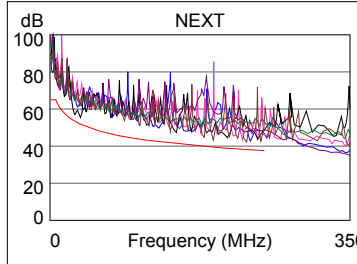

4・5番線と7・8番線
 でループ試験での値です。

	Worst Case Margin		Worst Case Value	
	MAIN	SR	MAIN	SR
PASS				
Worst Pair	36		45	
RL (dB)	3.2		7.0	
Freq. (MHz)	2.3		235.0	
Limit (dB)	20.9		14.3	

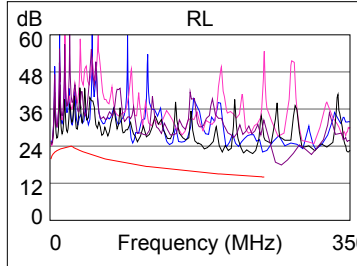

悪い場合は途中から波形が表から外れてチェックがバツになります




Cable ID: C6-FLAT CABLE-15M-02

Test Summary: PASS

Date / Time: 05/26/2009 06:25:10pm
Headroom: 5.4 dB (NEXT 12-36)
Test Limit: TIA Patch Cord Cat6 15.0m
 Cable Type: Cat 6 UTP SEED FLAT TYPE


Operator: QA
 Software Version: 2.1200
 Limits Version: 1.3400
 NVP: 69.0%

Model: DTX-1800
 Main S/N: 9406011
 Remote S/N: 9406012
 Main Adapter: DTX-PCU6M
 Remote Adapter: DTX-PCU6R




Wire Map (T568B)

PASS



Length (m)		N/A
Prop. Delay (ns)	[Pair 12]	?
Delay Skew (ns)	[Pair 12]	?
Resistance (ohms)	[Pair 45]	15.9

	Worst Case Margin		Worst Case Value	
	MAIN	SR	MAIN	SR
PASS				
Worst Pair	12-36		36-45	
NEXT (dB)	5.4		5.7	
Freq. (MHz)	19.5		240.0	
Limit (dB)	56.6		37.8	

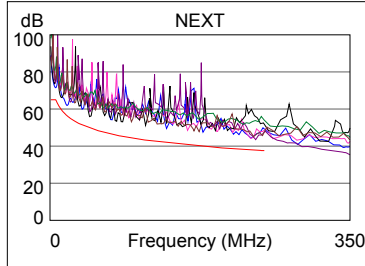

	Worst Case Margin		Worst Case Value	
	MAIN	SR	MAIN	SR
PASS				
Worst Pair	12		45	
RL (dB)	3.3		5.7	
Freq. (MHz)	121.0		232.0	
Limit (dB)	17.2		14.3	

